


REMACHE DE CLAVO

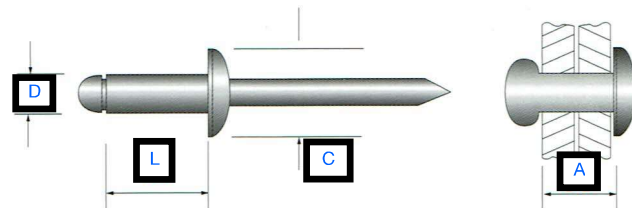

CLAVE	D DIÁMETRO DE VÁSTAGO		L LARGO NOM. DE VÁSTAGO		C DIÁMETRO DE CABEZA		A RANGO MAX. DE AGARRE		RESISTENCIA AL CORTE		RESISTENCIA A LA TENSIÓN		BROCA / DIAM. DE BARRENO RECOMENDADOS
	mm	pulg	mm	pulg	mm	pulg	mm	pulg	kg	lb	kg	lb	
AS-32	2.4	3/32	5.5	0.215	4.8	0.190	3.2	0.125	57	125	79	175	#41
AS-34			8.6	0.340			6.4	0.250					0.097-0.100
AS-41			4.7	0.187			1.6	0.062					
AS-42			6.4	0.250			3.2	0.125					
AS-43*			8.0	0.312			4.0	0.190					
AS-44*	3.2	1/8	9.5	0.375	6.4	0.250	6.4	0.250	95	210	147	325	#30
AS-45*			11.0	0.437			8.0	0.312					0.129-0.133
AS-46*			12.7	0.500			9.5	0.375					
AS-48			15.9	0.625			12.7	.500					
AS-52			6.7	0.265			3.2	0.125					
AS-54*			9.9	0.390			6.4	0.250					
AS-56*	4.0	5/32	13.0	0.515	8.0	0.312	9.5	0.375	154	340	222	490	#20
AS-58			16.2	0.640			12.7	0.500					0.160-0.164
AS-510			19.4	0.765			15.9	0.625					
AS-62			7.4	0.290			3.2	0.125					
AS-64			10.5	0.415	9.5	0.375	6.4	0.250					
AS-66													
AS-66CA			14.0	0.540	14.2	0.560	9.5	0.375					
AS-68					9.5	0.375							
AS-68CA			17.0	0.665	14.2	0.560	12.7	0.500					
AS-610					9.5	0.375							
AS-610CA			20.0	0.790	14.2	0.560	15.9	0.625	202	445	327	720	#11
AS-612					9.5	0.375							0.192-0.196
AS-612CA			23.2	0.915	14.2	0.625	19.1	0.750					
AS-614					9.5	0.375							
AS-614CA			26.4	1.040	14.2	0.560	22.2	0.875					
AS-616			29.5	1.165	9.5	0.375	25.4	1.000					
AS616CA					14.2	0.560							
AS-84			11.4	0.450			6.4	0.250					
AS-86			14.6	0.575	12.6	0.497	9.5	0.375	340	750	476	1050	#F
AS-88	6.4	1/4	17.8	0.700			12.7	0.500					0.257-0.261
SS-44	3.2	1/8	9.5	0.375	6.4	0.250	6.4	0.250	134	295	193	425	#30 0.129-0.133
SS-64			10.5	0.415			6.4	0.250					
SS-66			14.0	0.540	9.5	0.375							
SS-66CAG	4.8	3/16			15.9	0.625	9.5	0.375	268	590	370	815	#11
SS-68			17.0	0.665			12.7	0.500					0.192-0.196
SS-610			20.0	0.790	9.5	0.375	15.9	0.625	202	445	327	720	
AA-44	3.2	1/8	9.5	0.375	6.4	0.250	6.4	0.250	70	155	107	235	#30 0.129-0.133
AA-54	4.0	5/32	9.9	0.390	8.0	0.312			102	225	159	350	#20 0.160-0.164
AA-66	4.8	8/16	14.0	0.540	9.5	0.375	9.5	0.375	143	315	227	500	#11 0.192-0.196

* Inventario disponible en BLANCO, NEGRO, NATURAL, CAFÉ y especial en todos los colores.